

Pad Printing

Polymer Cliché Processing Instructions for PROTOPRO

The **PROTOPRO** green photo polymer clichés are ideal for all your pad printing cliché making needs. **PROTOPRO** clichés are easy to process and are extremely durable. Our **PROTOPRO** clichés are well suited for short production runs (maximum cycles: 10,000) and are formulated to work with both open inkwell and closed ink cup pad printing machinery.

Using our **PROSERIES** cliché making accessories you will achieve consistent results with less down time and minimal defects. The **PROSERIES** washout tub, washout brush, screen tint film, and anti-static accessories have all been specially selected and field-tested to ensure that the **PROTOPRO** clichés perform well.

PROCESS OVERVIEW:

Required Materials:

PROTOPRO Polymer clichés (many sizes are available, see our catalog for details)

PROSERIES Washout Tank

PROSERIES Washout Brush

PROSERIES Anti-static accessories (optional)

The **PROTOPRO** polymer clichés consist of a UV-sensitive photopolymer emulsion laminated to a thin steel backing plate. This special photopolymer emulsion makes the **PROTOPRO** clichés easy to process in most standard UV exposure units (a unit equipped with a vacuum frame is best). These clichés are designed for a single exposure time, with a depth of 27 microns.

The exposure is done with the film positive artwork (right reading) positioned over the cliché. If your artwork includes a large, bold open area, a second exposure might be needed. In this case, add the **PROSERIES** screen tint film covering the entire artwork image area. This will provide a more uniform and leveled depth to the image, preventing "scooping" during printing.

Next, the exposed cliché is hand-washed in DT-PDS (cliché developing solution) using a tank and brush. The developing solution removes the soft, unexposed material (where the film positive blocked out the light) from the artwork area. The cliché is then "baked" in an oven for approximately 30 minutes to dry out excess moisture and complete the curing/hardening process. After baking, the cliché is re-exposed in the UV exposure unit for 3 minutes, giving it an extra hardening surface, ready for use in the printing process.

STEP 1 - FILM POSITIVE EXPOSURE: The photo-polymer emulsion on the cliché will harden when exposed to a UV light source. By using a film positive artwork (matte film is required), the areas of the cliché emulsion which are blocked by the film positive (the black image on the clear film) will not harden, while the open area of the cliché will harden. This first exposure creates the actual image in the cliché.

1 Remove a single **PROTOPRO** cliché from the black protective bag under "UV safe" light source to prevent pre-exposure of the emulsion by any ambient light sources.

TECH TIP: Clear or yellow UV sleeves are available from DECO TECH for making your 4 ft. or 8 ft. fluorescent tubes UV safe. Call customer service for details and pricing.

2 Remove and discard the translucent protective film cover from the cliché. (Figure 1)





Figure 1

3 Ensure that all dust and dirt is removed from the film positive (Figure 2) as well as the exposure units' blanket & acetate or glass cover. (Figure 3)

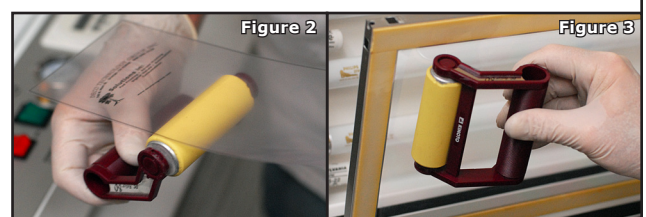

TECH TIP: To remove dust, it is best to use an anti-static film cleaner or use an anti-static brush.

4 Lift the vacuum frame and place the cliché into the center of the UV exposure unit with the clichés emulsion side facing the light source. (Figure 4)



NOTE: Depending upon your exposure unit this may be face-up or face-down. On the Deco Tech **X-POSÉ** units this is face-up.

5 The film positive is now placed onto the cliché with the emulsion side (matte side) facing down and in direct contact with the clichés emulsion side. **MATTE FILM IS REQUIRED** (Figure 5)



6 Close the exposure units vacuum frame (cover) over the cliché and film positive

7 Turn on the vacuum (Figure 6) and allow the film positive to be pulled down into contact with the cliché and remove any trapped air bubbles. (Figure 7)



8 Close the exposure unit and set the exposure time to 90 seconds.

9 Once the first exposure is complete, open the exposure unit and bleed off the vacuum to release the cliché and film positive. (Figure 8)



10 Lift the vacuum frame (acetate) off of the cliché and remove the film positive from on top of the cliché.


STEP 2 - WASHOUT AND ETCHING PROCESS: In this step the unexposed emulsion in the cliché is removed using the PROSERIES Washout solution. This step allows the washout solution to remove all unexposed soft emulsion in the artwork image and creates the actual etching in the cliché. The washout tray should be prepared by filling it with the PROSERIES Washout solution to a depth of 1/4 to 1/2 inch.

11 Place the **PROTOPRO** cliché into the washout tank filled with washout solution with the emulsion side of the cliché facing up. (Figure 9)




TECH TIP: The washout solution should be at room temperature.

13 If available, use a compressed air nozzle to blow off the excess water from the etched cliché **NOTE:** This step is optional see tech tip below for alternative. (Figure 11)



TECH TIP: If compressed air is not available, then pat dry with a paper towel.

12 Using the **PROSERIES** washout brush, apply light hand pressure and brush the cliché in a circular motion, brushing for at least 3 minutes (or sufficient amount of time to remove all of the unhardened emulsion.) (Figure 10)



TECH TIP: Alternate your brush strokes & direction every 10 to 15 seconds and brush the entire cliché surface. Staying in one area will create an uneven depth of the etch.

STEP 3 - FINISHING EXPOSURE: In order to finish the curing process of the cliché, which will remove any water that has been absorbed into the photo-polymer emulsion, the cliché must be cured/ hardened in an oven. The recommended oven type will have air circulation and the ability to maintain the desired temperature without fluctuation. Testing may be necessary to ensure the optimum operating conditions for your oven.

14 Place the cliché into an oven with the etched image facing up for a minimum of 20 minutes at 180° F. (Figure 12)




Figure 12

15 After curing time is completed, using thick heat resistant gloves, remove the cliché from the oven. Allow the cliché to return to room temperature before using on press.